

Refrigeration Dryers

SMARD SRD | MRD SERIES

BENEFITS AND FEATURES

- Lower energy consumption
- Corrosion-free air circuit, made of copper and stainless steel
- Powder-coated housing
- Unique heat-exchanger technology




Technical Data	SC 5 - 10	SC 18 - 30	SC 47 - 53	80	105 - 310
Inlet / Outlet	Right	On rear	Right side panel (inlet), rear (outlet)		
Bypass	○				
Refrigerant	R134a			R407c	
Air cooling	standard				
Water cooling	-				
Heat Exchanger	Copper tubes		Stainless steel plates (copper-welded)		
IP rating	IP23				
Dew point indication	Analogue gauge				Digital LED, with alarm lamp
Potential free alarm contact	-		○		
Time-controlled condensate drain		●			
Electronic level-controlled drain	-		○	●	

General Data	
Medium	Compressed Air
Housing	Steel
Colour - Top Panel	RAL 9001 (white), powder-coated
Colour - Housing	Grey, powder-coated
Location	Indoors

Model	Flow Rate m³/h	Connection	Dimensions			Weight kg	el. Connection V/Ph/Hz	Power Consumption kW
			A	B	C			
Smard SC 5	20	3/8"	344	320	390	15	230/1/50	0.24
Smard SC 10	30			320		19		
Smard SC 18	60			320		29		
Smard SC 24	80	3/4"	368	419	575	29	230/1/60	0.42
Smard SC 30	100			500		523		41
Smard 47	140	1"	363	891	601	50	230/1/50	0.58
Smard 53	160			951		53		0.60
Smard 80	240			951		58		0.87
Smard 105	315	2"	483	1,011	761	72	230/1/50	1.10
Smard 120	360			1,011		78		1.30
Smard 157	470			1,011		86		1.48
Smard 194	580	2"	533	1,191	811	100	230/1/50	1.90
Smard 227	680			1,191		112		2.45
Smard 273	820			1,291		134		2.55
Smard 310	1,000		583	1,361		155		2.70

* ISO 7183, based on the intake volume of the compressor at +20°C and 1 bar (a), operating pressure 7 bar (g), inlet temperature +35°C, ambient or cooling water temperature +25°C, pressure dew point +3°C | Technical data and specification are subject to change without prior notice

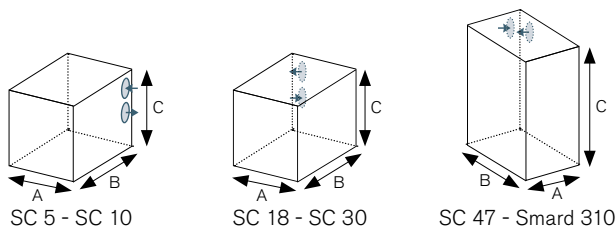

Design data*		Min.	Nom.	Max.
Operating pressure		3 bar (g)	7 bar (g)	16 bar (g)
Inlet temperature		+4.4° C	+35° C	+49° C
Ambient temperature	SC 5 - SC 30	+4.4° C	+25° C	+49° C
	47 - 310	+4.4° C	+25° C	+43° C

* The following correction factors need to be used to select the correct unit for other operating conditions. Deltech® refrigerant compressed air dryers are best used with a Deltech® PF pre-filter and a HF after-filter.

Correction factors for different operating pressures in bar (g) (F ₁)														
bar (g)	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Smard SC 5 - 30	0.84	0.90	0.93	0.97	1.00	1.02	1.04	1.06	1.07	1.08	1.09	1.10	1.10	1.11
Smard 47 - 310	0.79	0.87	0.92	0.96	1.00	1.03	1.07	1.10	1.13	1.16	1.18	1.21	1.22	1.24

Correction factors for different inlet temperatures in °C (F ₂)				
°C	+35	+40	+45	+49
Smard SC 5 - 30	1.00	0.86	0.75	0.69
Smard 47 - 310	1.00	0.85	0.71	0.63

Correction factors for different ambient temperatures in °C (F ₃)					
°C	+25	+30	+35	+40	+43
Smard SC 5 - SC30	1.00	1.00	1.00	1.00	1.00
Smard 47 - Smard 310	1.00	0.92	0.85	0.80	0.78

Selection example	Calculation
Compressor capacity (V ₁)	$V_2 = \frac{V_1}{F_1 \cdot F_2 \cdot F_3} = \frac{520}{1.1 \cdot 0.71 \cdot 0.85} = 783 \text{ m}^3/\text{h}$
Operating pressure (F ₁)	
Inlet temperature (F ₂)	
Ambient temperature (F ₃)	
V ₂	
	Required dryer capacity
	Selection: Smard 273